


- ORIENTATION OF VENDOR CODE IS OPTIONAL.
- EXAMPLE BAR CODE LABEL ATTACHED IN AREA SHOWN. LABEL WILL INCLUDE PART NUMBER AND TRACEABILITY INFORMATION.
- MUST MATE WITH PACKARD CONNECTOR 12103345.
- RECOMMENDED MOUNTING PROCEDURE FOR THE PRESSURE SENSOR IS TO HAVE THE PORT POINTED DOWN WITHIN 30° OF VERTICAL. THIS WILL INSURE THAT ANY CONDENSATE OR LIQUID IN THE LINE WILL DRAIN AWAY FROM THE SENSOR CELL. THE PRESSURE SENSOR SHOULD BE MOUNTED HIGHER THAN THE VACUUM SOURCE TO ASSIST IN DRAINING THE LINE. MAXIMUM MOUNTING TORQUE 3.5N-m.
- ELECTRIC OUTPUT:
  - OUTPUT OF MODULE MUST BE IN ACCORDANCE WITH THE TRANSFER EQUATION WITHIN RATING SPECIFICATION  
 $V_o = V_s (0.01059 P - 0.15180)$ .
  - ERROR FROM THE EQUATION MUST BE WITHIN THE FOLLOWING LIMIT ( $V_o = V_o \pm V_e$ ):  $V = V_s T_e$   
 $P_e (0.01059) T_e$  &  $P_e$  OBTAINED FROM FIG 1 & 2.
  - WITH PART AT 25°C AND SUPPLY VOLTAGE AT 5.1V THE OUTPUT VOLTAGE (V<sub>out</sub>) SHALL BE:

P	V <sub>out</sub> MIN	V <sub>out</sub> MAX
20	0.193	0.419
40	1.321	1.451
94	4.238	4.368
105	4.816	4.977
  - THE LOAD IMPEDENCE SEEN BY SENSOR SHALL BE 5kOhm.
  - V<sub>s</sub> SHALL BE ISOLATED & FILTERED SUCH THAT INPUT NOISE IS NO GREATER THAN 10mV P-P.
- PART WEIGHT: 57.0 gr ±10%

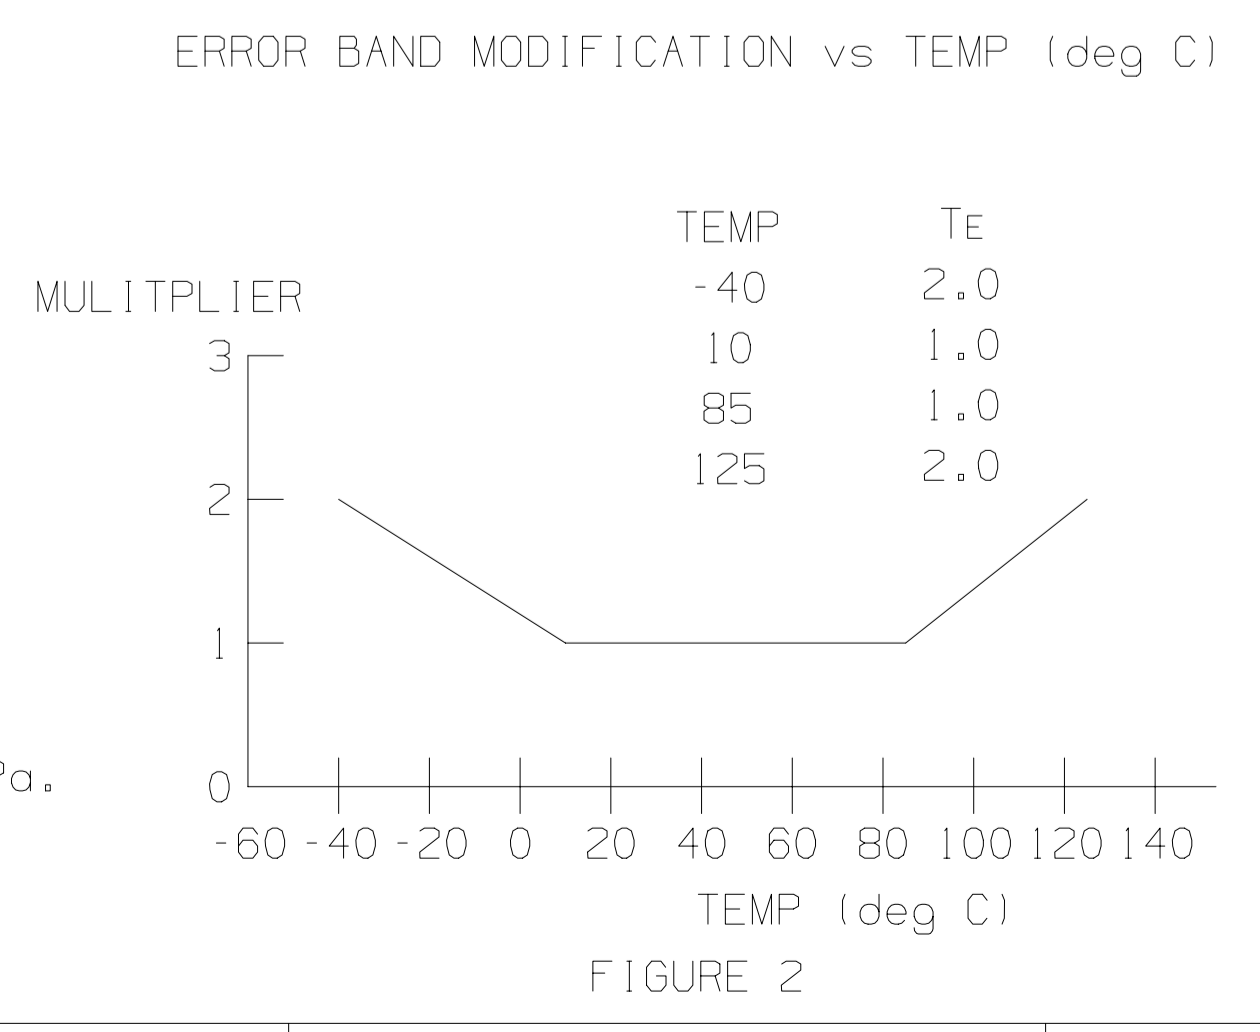

PARAMETER	SYMBOL	VALUE	UNITS
OPERATING PRESSURE	P	20 TO 105	kPa
OPERATING VOLTAGE	V <sub>s</sub>	5.1 +/- 0.36	V
OPERATING TEMPERATURE	T <sub>A</sub>	-40 TO 125	°C
STORAGE TEMPERATURE	T <sub>stg</sub>	-50 TO 150	°C
OVER PRESSURE	P <sub>ovr</sub>	2* MAX P	kPa
CURRENT DRAIN	I <sub>sMAX</sub>	20	mA
PRESSURE RESPONSE TIME *	T <sub>p</sub>	6	ms
POWER UP RESPONSE TIME **	T <sub>v</sub>	6.25	ms
OUTPUT NOISE ***	N	10	mV P-P
LEAK RATE (@ ANY OP. PRES.)	Plk	1.7 IN 30s	kPa

\* 90% OF STEADY STATE RESPONSE TO CHANGE TO ANY OPERATING PRESSURE FROM ANY OTHER OPERATING PRESSURE.  
\*\* APPLICATION OF 4.74V PART MUST STABILIZE WITHIN +/-0.2 kPa.  
\*\*\* OUTPUT NOISE DEFINED AS AC VOLTAGE > 10 KHZ.

SCALE 2/1 DIST -

**DELPHI**  
Automotive Systems

METRIC  $\leftarrow$  mm  $\rightarrow$   
UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE IN MILLIMETERS, AND THE TOLERANCES ARE:  
ONE PLACE DECIMALS ± 0.4  
TWO PLACE DECIMALS ± 0.25  
ANGLES ± -  
DRAFT ANGLES ± -  
SHARP CORNERS ± -

GD&T SEE ASME Y14.5M-94 FOR GD&T INTERPRETATION  
PDM CHANGES ALLOWED ONLY BY PDM DOCUMENT PROCEDURES  
UG DO NOT SCALE THIRD ANGLE PROJECTION

FIRST USED 12219931	DES DEREK A. DELRYMPLE	19AP02
REFERENCE GEN 1.5	APR R.LONGSTREET	19AP02
EXP MODEL -	APR J.SCHNEIDER	19AP02
EXP NUM 160068350	APR N/A	
	APR N/A	
	APR N/A	

MATERIAL SPEC -

KEY PRODUCT CHARACTERISTICS  
SAFETY/COMPLIANCE  
FIT/FUNCTION

DRAWING NAME  
OUTLINE-P/SNSR

PART NUMBER  
12219931

SHT 1 OF 1

UG V16.0 SIZE A1

DELPHI DELCO ELECTRONICS SYSTEMS  
Division of DELPHI AUTOMOTIVE